



## Yuasa Technical Data Sheet

### Yuasa YBX9115 - YBX9000 AGM Start Stop Plus Batteries

\* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

#### Performance

|                          |      |
|--------------------------|------|
| Voltage                  | 12V  |
| Capacity (20-hour)       | 80Ah |
| Cold Cranking Amps (EN1) | 800A |

#### Dimensions

|        |       |
|--------|-------|
| Length | 317mm |
| Width  | 175mm |
| Height | 190mm |

#### Weights & Measures

|                       |        |
|-----------------------|--------|
| Mean Weight with Acid | 23.2kg |
|-----------------------|--------|



#### Container Features

|                        |            |
|------------------------|------------|
| Case Type              | L4 DIN AGM |
| Hold Down              | B3         |
| Handles                | ✓          |
| End Venting            | ✓          |
| Semi-Traction Features | ✓          |
| Lid Type               | VRLA       |


#### Technology

|                         |             |
|-------------------------|-------------|
| Flame Arrestor          | ✓           |
| Technology              | Ca/Ca VRLA  |
| Separator               | AGM         |
| VDA Roll Over Test      | ✓           |
| Recommended Charge Rate | 5A          |
| Performance Marking     | W5-C2-V3-M3 |


#### Terminal Type

##### T1


Standard DIN Post

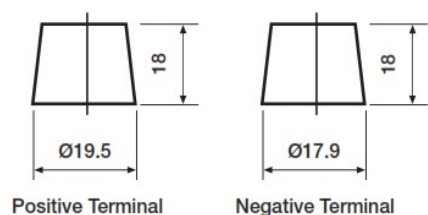

#### Cell Assembly Layout

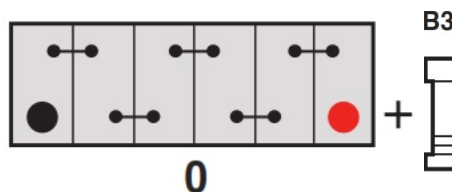

#### Battery Hold-down

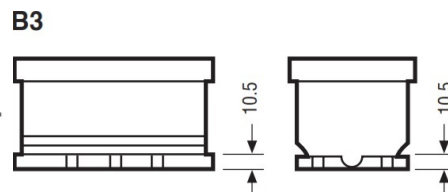

Data Sheet generated on 11/11/2020 - E&OE